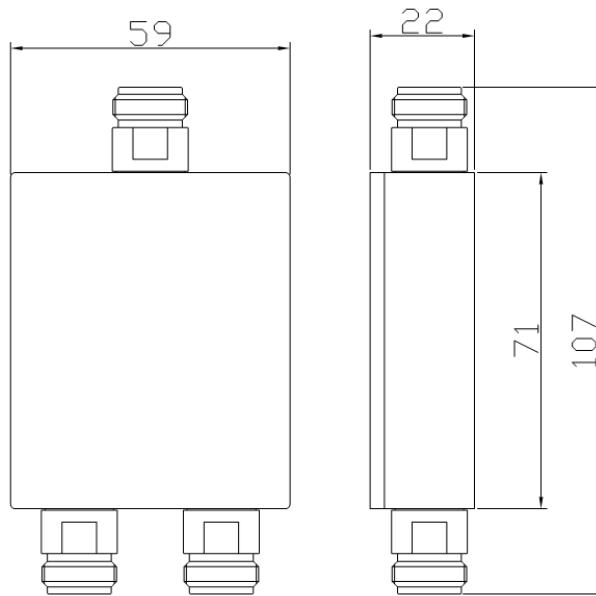
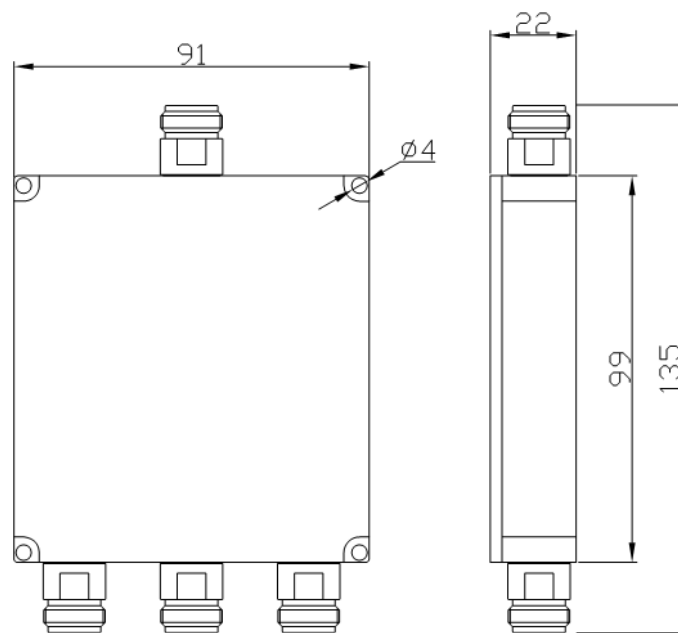
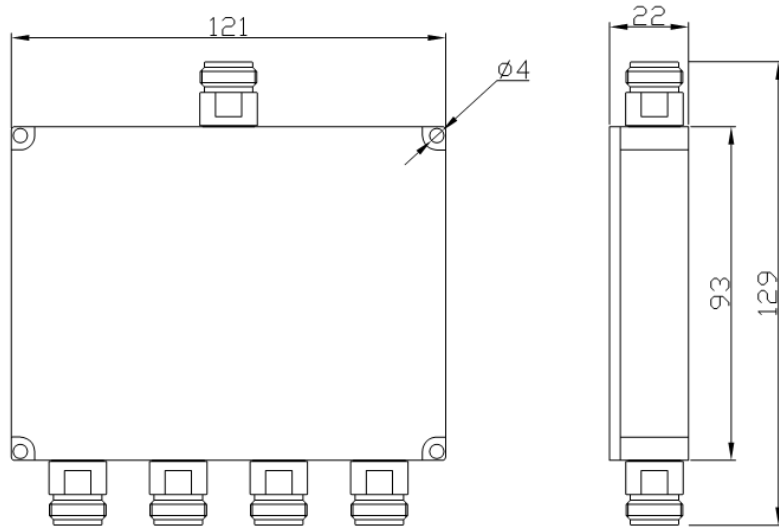


Low power splitter specification

	2 Way	3 Way	4 Way
PN	SP2-727-NF SP2-727-MF	SP3-727-NF SP3-727-MF	SP4-727-NF SP4-727-MF
Frequency Band	698 – 2700 MHz	698 – 2700 MHz	698 – 2700 MHz
Split Loss	3.0 dB	4.8 dB	6.0 dB
Insertion Loss	0.4 dB	0.5 dB	0.6 dB
Isolation	20 dB	20 dB	19 dB
3rd Order IMD 2X43dBm	- 153dBc	- 153dBc	- 153dBc
Return Loss	21 dB	20 dB	19 dB
Average Power, max	5W	5W	5 W
Impedance	50 ohm	50 ohm	50 ohm
Environment	IP65	IP65	IP65
Work temp	-40-75C	-40-75C	-40-75C
Connector	N(f)	N(f)	N(f)

**2 Way splitter****3 Way splitter**

**4 Way splitter**